


## ND- 3000C

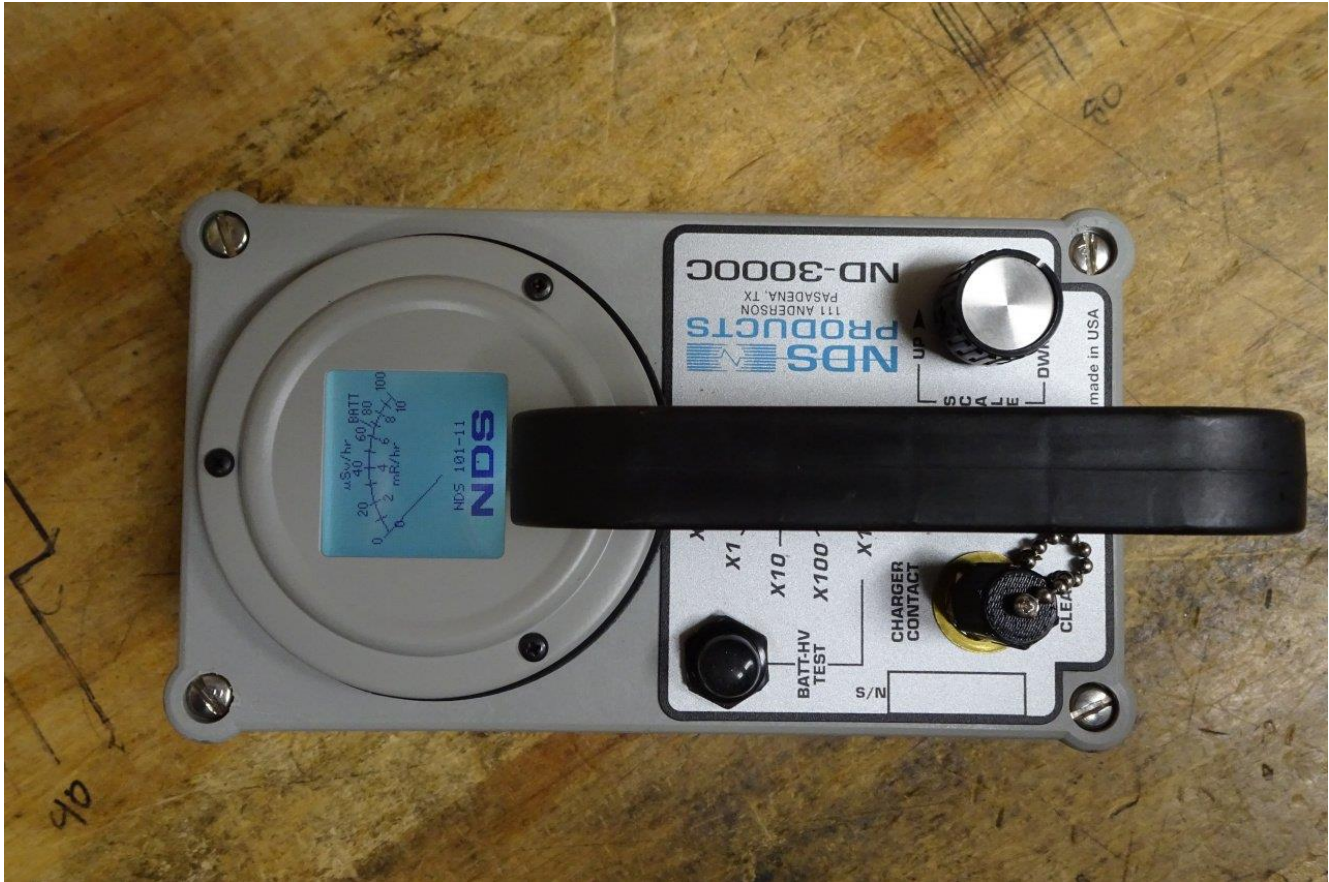

**Five Range 0-10 R/hr Dustproof Rugged Survey Meter with built-in dosimeter charger**  
**LCD Display available in mR/hr and uSv/hr**  
**Two Halogen Quenched Energy Compensated GM Tubes**  
**Ranges 0-10,000, 0-1000, 0-100, 0-10, 0-1 mR/hr and 0-100,000, 0-10,000, 0-1000, 0-100, 0-10 uSv/hr**  
**Operates on Two "D" Cell Batteries**  
**Energy Response Within 20% From 80-2000 KeV Gamma and X-Ray**  
**Saturation In Excess of 1000R/hr When Calibrated and Maintain Properly**  
**4.4"W x 7.75"L X 6.25"H Including Handle**  
**3 Pounds, 15.5 Ounces With Batteries**  
**Operating Temperature: -20 to 50 °C (-4 to 122 °F), Humidity: Non-Condensing 95%**  
**Bright 2.47 Volt Lamp in Dosimeter Charger Allows Enhanced Viewing of Dosimeter Scale**  
**CE**

**NDS**   
**PRODUCTS**

 **MARQUES  
& CIA**

EQUIPAMENTOS PARA ENSAIOS E INSPEÇÃO

 (19) 99768.8232  [www.cmarques.com.br](http://www.cmarques.com.br)

 [cmarques@cmarques.com.br](mailto:cmarques@cmarques.com.br)