



Ultrasonic Thickness Gauge

Upad X410


X Series : High Performance, Low Price

Upad X Series Ultrasonic Thickness Gauge will be the best choice for accomplishing measurement. It fits many kinds of metal, such as steel, cast steel, aluminum, plastic, China glass, glass fiber and any other good conductors of ultrasonic.

There are three vision in Upad X Series, Upad X100, X200 and X300. X300 could measure the thickness of metal covered with coating, the thickness of metal base will be showed.

Advanced Auto Probe Zeroing Calibration and Echo-Echo mode are applied on Upad X series. Taking more accurate measuring result and higher production rate to you.

Upad X Series is creative, it will supply a superior experience for users.

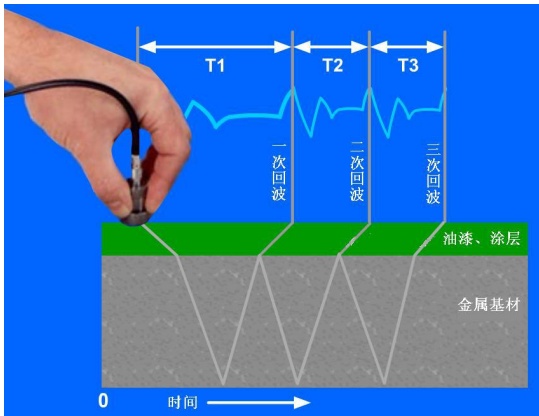

The indicator of eliminating coating

No 0	MAX	10.00
File 0		
EE		10.00 mm
↑ 300.0	MIN	1.00
↓ 0.00		

Measuring Interface

OPERATION

- Inco Style Menu
- Showing different data modes
- Stroll Bars Indicates Function
- Free to change : Huge front and normal

FUNCTION

- USB for Storage, Plug and Play
Covenient to read thickness values
- Massive Data Memory-100,000 data sets
1000 files could be saved , every file could memory 1000 data sets



Brief Interface



Menu

■ Statistic Function

Online statistic :Max Min, Standard Devraation
Document Statistic : Max Min Average, mean square error

■ Probe Connection/Coupling Indicator

OPERATION

■ Accuracy : 0.1/0.01mm or 0.01/0.001 inch resolution

■ Extra-long standby time : 200 hours.

performance index	
Working principle	Ultrasound (ultrasonic pulse echo / echo echo)
Detection range	Normal mode : 0.75~400mm Penetrate the coating : 2~25mm (Depending on the probe, the measured material and surface condition)
Resolution	0.1mm (> 100mm) / 0.01mm (<100mm)
Indicator	± (0.5%H+0.01) mm
Velocity	1000~9999m/s, Preset 5 commonly used material velocity
Calibration	Through the realization of real-time calibration probe zero unique automatic zerocalibration technique
V range correction	Auto
Probeconnection indicating	

Yes
Coupling condition
Cue signal coupling intensity; measured value displayed solid / hollow change, visual indication of whether the normal measurement
Appearance size
165×82×30 mm
Weight
250g (Including battery)
Work environment
Temperature: -20°C~70°C
Humidity: 5%~90%
The environment without strong vibration, no strong magnetic field, non corrosivemedium and serious dust.
Measuring Range:
Normal : 0.75~400mm
Coating : 2-25mm
Excitation pulse
150V Negative spike

Receiving system	
Gain	High / low / automatic
Frequency	bandwidth
0.5~15MHz	
Display	
OLED display	
Refresh rate measurement	Single point measurement of 5 times per second, 25 times / sec scan mode
Measured value / alarm	
Measured value display	3 custom measurement display area, can choose online statistics or sound
Statistical data	Online Statistics: maximum, minimum, standard deviation Document statistics: maximum / small value, mean, variance
Alarm	Acousto optic alarm threshold
Storage	
Data set	1000 Sets



NDT expert

Solid (Beijing) Technology Co., Ltd.

The thickness values 1000sets/Group Linearity	Communication /USB	Working time Can work continuously for 200 hours (standard test conditions)
USB Storage Connection USB is allowed, convenient to read thickness values	Language Chinese/ English	Standard Package
Input and output	Unit mm/inch	
probecconnection LEMO 00 (C5) x2	Power Source	Host 1 Instructions 1
	Battery 1.5V AAA x 4	Probe 1 Packingbox 1
		Battery 1 couplant 1

... Probe of Our Thickness Gauge

Model	Automatic zero	Measurement precision	USB	Penetrate the coating	Statistical function	Storage Capacity
Upad X410	V	0.1/0.01mm	V	V	Online statistics / data statistics	1000 Groups

... Probe of Our Thickness Gauge

Application	Mode	Rate	Probe Diameter	Measuring range	Minimum diameter
Standard application	DA301S	5 MHz	10mm	0.75mm~400.0mm (Steel)	Φ20mm×3.0mm
Standard application	DA301S/90	5 MHz	10mm	0.75mm~400.0mm (Steel)	Φ20mm×3.0mm
Thick Wall	DA303S	2 MHz	22mm	3.0mm~300.0mm (Steel)	20mm
Thin wall	DA312S	7 MHz	6mm	0.75mm~80.0mm (Steel)	Φ15mm×2.0mm
High temperature	HT400S	5 MHz	14mm	3~200mm (Steel)	30mm
High attenuation	DA408S	2 MHz	22mm	40mm↓ (Grey cast iron HT200)	20mm

... Commonly used material velocity

Material type		Sound velocity	
		inch/us	m/s
Aluminum	Aluminum	0.250	6340-6400
Steel, common	Steel, common	0.233	5920
Steel, stainless	Steel, stainless	0.226	5740
Brass	Brass	0.173	4399
Copper	Copper	0.186	4720
Iron	Iron	0.233	5930
Cast Iron	Cast Iron	0.173-0.229	4400-5820
Lead	Lead	0.094	2400
Silver	Silver	0.142	3607
Gold	Gold	0.128	3251
Titanium	Titanium	0.236	5990
Tin	Tin	0.117	2960
Nickel	Nickel	0.222	5639
Porcelain	Porcelain	0.230	5842
Rubber, vulcanized	Rubber, vulcanized	0.091	2311
Water	Water	0.058	1473

Solid (Beijing) Technology Co., Ltd.

Add: A-2506 Fortune Center, Beiyuan Road, Chaoyang District, Beijing, China

Web: www.solidnde.com